







Vandal Proof



Tri-Axis

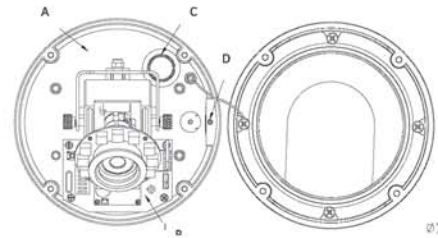

Ø142.0

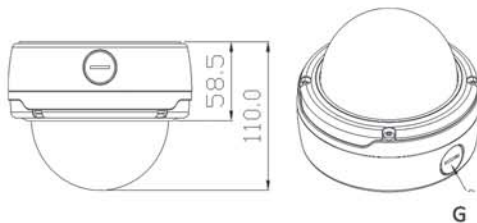

FUNCTION	+	-
1	AI	AES
2	BLCOFF	BLCON
3	SUPAGC	AGC
4	FLOIN	FLOFF



FEATURES



- 1/3" Sony H.Q.1 CCD Sensor
- Mechanical IR Cut Filter
- Vari-Focal Vandal Proof
- Indoor/Outdoor Weather Proof: IP66
- Day/Night Color IR Dome Camera
- Dual Voltage: 12V DC / 24V AC
- 3.7~12mm Auto Iris Lens
- Anti-scratch cover coating

SPECIFICATIONS

Model	CC-9035DHL
Power Requirements	DC 12V / AC 24V
Synchronization	Internal/Line-lock auto detect
Image Device	1/3" Sony H.Q.1 CCD
Scanning System	PAL: 625 Lines, NTSC: 525 Lines 2:1 Interlace
Picture Elements	PAL: 795x596, NTSC: 811x508
Horizontal Resolution	550 TV Lines
Current Draw	500mA @ 12V DC
Minimum Illumination	0 Lux under IR illumination
IR Wavelength	700~1100nm (Built in 850nm)
OLPF Switching	Auto switching
S/N Ratio	Better than 50dB
Gain Control	ON/OFF switchable
Focal Length	3.7~12mm@F1.6
White Balance	AWB
Gamma	0.45
Backlight Compensation	ON/OFF switchable
Product Material	Metal
Video Output	1Vp-p, 75Ω composite
Vandal Proof	10 pounds of sledgehammer durability
IP Code	IP66
Operating Temperature	14°F~122°F (-10°C~50°C)

*Specifications Subjected to Change Without Prior Notice.

